

BRAZED PLATE HEAT EXCHANGER

900kW*



Covering outputs of 60, 150, 300, 450, 600, 750 and 900kW. Brazed Plate Heat Exchangers ensure optimum heat transfer efficiency and low resistance within a compact footprint. To be used with Ideal Commercial Frame and Header kits.

FEATURES & BENEFITS

- Compact design
- No gaskets
- Low maintenance and self-cleaning
- All units are pressure tested
- To be used with Ideal Commercial Frame and Header kits
- Ensures optimal heat transfer efficiency and pressure resistance
- Separates system water from the boiler
- Ensures the highest performance for longest possible service life

DIMENSIONS

The dimensions below represent the Plates only.




LENGTH 441mm



WIDTH 324mm



HEIGHT 990mm

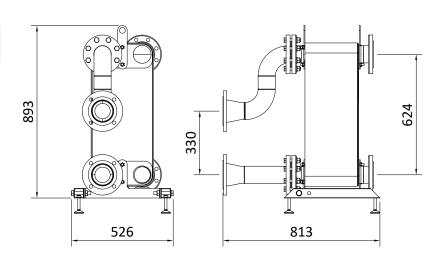



BRAZED PLATE HEAT EXCHANGER 900kW SPECIFICATIONS

TECHNICAL SPECIFICATION				
		HOT SIDE	COLD SIDE	
Mass flow rate	kg/s	10.77	10.78	
Inlet temperature	°C	80.0	50.0	
Outlet temperature	°C	60.0	70.0	
Pressure drop	kPa	13.5	14.5	
Heat exchanged	kW	900		
Heat transfer area	m^2	21.56		
Flow configuration		Countercurrent		
Number of plates / thickness		100 / 0.3 mm		
Number of passes		1	1	
Pressure vessel code		PED		
Design pressure at 90.00 Celsius	Bar	30.0	30.0	
Design pressure at 225.0 Celsius	Bar	25.0	25.0	
Design temperature	°C	-196.0 / 225.0		
Overall length x width x height	mm	441 x 324 x 990	441 x 324 x 990	
Net weight, empty / operating	kg	80.4 / 130		


FRAME & HEADER CONNECTIONS

DN100 Evomax 2

STANDARD MATERIALS		
Cover plates	Stainless steel	
Connections	Stainless steel	
Plates	Stainless steel	
Brazing	Copper	

^{*}This is the nominal capacity of the plate heat exchanger applying the operating conditions shown in this document. Please contact Ideal Commercial to confirm the expected performance if the operating conditions differ from those shown.

SYSTEM CONNECTIONS DN80

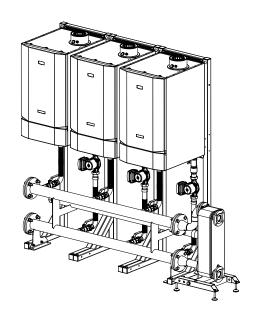

211387

GET A QUOTE

W: IDEALCOMMERCIALBOILERS.COM E: commercial@idealboilers.com

T: 0844 543 6060





